



United co. for projects & technical advices

TECHNICAL DATA SHEET

UPTA 8

DESCRIPTION & APPLICATION

Natural, very fine, **CALCIUM CARBONATE** powder obtained from high purity, very white limestone with the highest technology. used in exterior emulsion paints, industrial paints , adhesive, solvent based and water based paints, paper and high gloss powder coatings ,etc

CHEMICAL ANALYSIS


CaCO ₃	99.20%
MgCO ₃	0.20%
Fe ₂ O ₃	0.01%
HCl insoluble content	0.20%

SPECIFICATION PRODUCTION DATA

Fineness:	
Residue on a 45 µm sieve	0.01%
Top cut (d97)	8µm
Mean particle size (d50)	2µm
Particles under 2µm	50%
whiteness %	96,5%
Yellowness index	0.70%
Moisture ex works	0.20%
Hardness by Moh's	3 Moh's

GENERAL PRODUCTION DATA

Packed bulk density	0.9 g/ml
pH value	9
Oil absorption	21g/100g

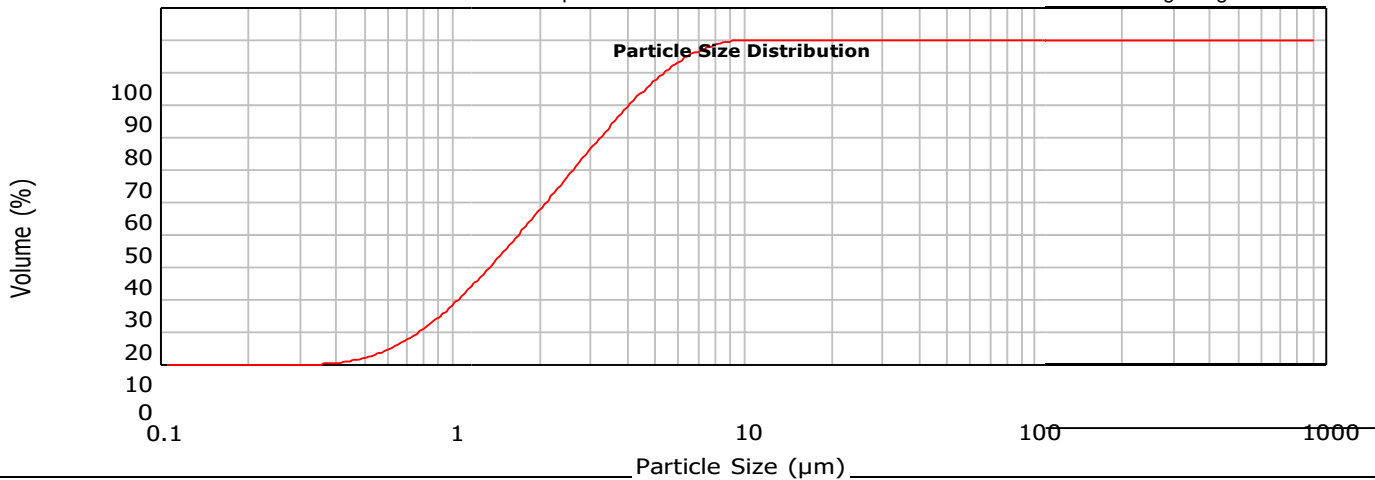

The data in the Technical Data Sheet represent the average values which are valid and reliable but not legally binding. UPTA will not be liable for any use of data, or any damages arising from the use of products for purposes not examined in detail. This Technical Data Sheet renders all previous versions invalid.

Add. / SECTION NO 35 MINERAL SECTOR BAYAD EL-ARAB Industrial Zone,
Beni Suif City, Egypt

www.UPTAEgypt.com
Email: info@UPTAEgypt.com Tel 01022994404